

GPX

Machine Room-Less Elevator
Reliability As Our Top Priority

GPX-A ◆Elegance Series

JFI adds wide range of interior design for selection.



Specification

- Ceiling Panel : Bi colour with laminated steel sheet
- Lightings : Energy Saving LED
- Car Operating Panel : Tinted black / Surface Mounted Type
- Handrail : Stainless Steel (Hairline)
- Flooring : Vinyl File
- Wall Panel : Pattern Steel
- Landing Door : Pattern Steel
- Car Door : Pattern Steel
- Hall Operating Panel : Tinted black / Surface Mounted Type



Quality

Actual product subject to validation.



LW-1002



User-Friendly

Actual product subject to validation.



Z03




Environmental Friendly



LNA-108




LG01



◆Maximised Cabin Size

Space saving design maximise our cabin size.




◆Up to 60 Meters Per Miumte

State and the art technology providing you a smoother ride.



◆Permanent Magnet Motor

High efficiency motor with enhanced safety features that meet the requirement of EN 81-20.



◆Class A Energy Efficiency

Lift energy efficient standeral according to VDI 4 to part.




◆Reduced Wating Time

High performance processor that reducer wating time.



◆Bigger-Capacity

Up to maximum of 8 persons.

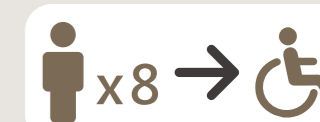

SMART MAINTENANC SYSTEM(SMS)



GPX Elevator Specifications

Loading Capacity	450kg	550kg
Speed	45m/min	60m/min
Control	AC-VVVF	
Power Supply	Single Phase 60H / 220V	
Illumination	Single Phase 60H / 110V	
Motor Capacity	3.0KW	3.7KW
Cabin Dimension w ^o d ^o h	1000*1200*2200	1000*1400*2200
Entrance Dimension w ^o h	900*2100	
Shaft Dimension (w ^o d)	1650*1550	1650*1750
Door Type	2 Panel Side Open	
Cabin Guide Rail	8Kg / m	
Counterweight Guide Rail	8Kg / m	
Rope	φ 8 x 4	
Rope Ratio	2 : 1	
Speed Governor Rope	φ 8 x 1	
OH	3700	3900
Pit	1250	1500


GPX-B



Designate floor parking feature, when the elevator is not used for a preset period of time.



Single phase working power.




(Optional)

Uninterruptible power supply in the event of building power outage

Optical sensor

Certified and proven to meet stringent standards.

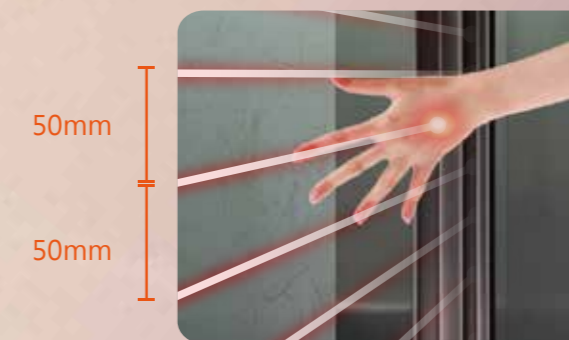

Door Type



Big Glass Door



Wide Door Jamb



Transom

Specification

Ceiling Panel : Bi colour with laminated steel sheet

Lightings : Energy Saving LED

Car Operating Panel : Tinted black / Surface Mounted Type

Handrail : Stainless Steel (Hairline)

Flooring : Vinyl File

Wall Panel : Pattern Steel

Landing Door : Pattern Steel

Car Door : Pattern Steel

Hall Operating Panel : Tinted black / Surface Mounted Type

This product color styles are sample reference only.



LNW-24



LG-04



LW-1002



Y01



NEB-08

The above product styles are for reference only, the style is based on real products.

Machine Roomless Elevator



CE Machine Room Less Elevator



Machine Room Less Elevator

1. Without the need of a machine room.
2. Reduced installation time.
3. Low overhead requirement.
4. Wider choice over Hydraulic driven elevator.
5. Low noise and no vibration.
6. Space saving design.
7. Seismic sensing features.

AC-VVVF

Variable speed control of the motor, that provide a smoother ride, swing acceleration and deceleration.

